

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 154 585 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

14.11.2001 Bulletin 2001/46

(51) Int Cl.7: H04B 1/707

(21) Application number: 00110027.0

(22) Date of filing: 12.05.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(71) Applicant: ROBERT BOSCH GMBH

70442 Stuttgart (DE)

(72) Inventor: Vejlgaard, Benny


9260 Gistrup (DK)

(54) Receiver for a communication device for a multi-path radio channel

(57) Communication device, in particular comprising a CDMA RAKE receiver arrangement, having a signal generator for generating at least m locally generated signals, which are time delayed by a delay time from each other, and a correlator for obtaining m correlated

signals by correlating a received identification signal with the m locally generated signals, wherein the receiver comprises a ranking arrangement for identifying j correlated signals of highest power out of the m correlated signals.

Fig. 1

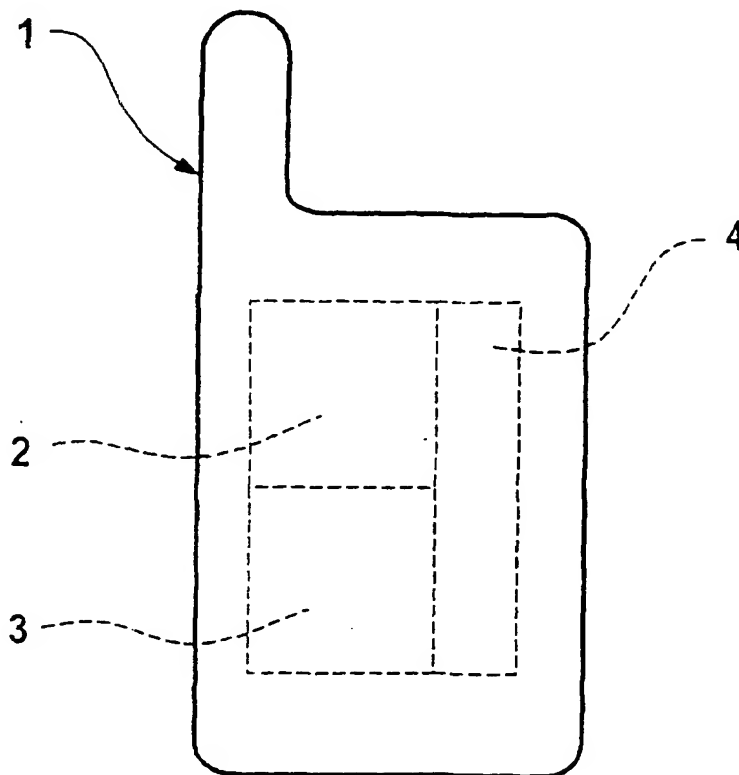

Description

[0001] The present invention relates to a receiver, in particular a Code Division Multiple Access (CDMA) receiver, for a, in particular mobile, communication device.

[0002] A (mobile) communication device in particular a mobile communication device having a Code Division Multiple Access (CDMA) receiver, may be allocated to a base station. When the mobile communication device is allocated to the base station, the mobile communication device will, due to reflections, receive multi-path components of a signal sent by the base station. A known receiver for receiving multi-path signals from a base station comprises a correlator for correlating the identification signal of the base station with locally generated signals and an hypothesis algorithm judging whether the time delay of the locally generated signal matches the delay time of a multi-path component in the received identification signal. A receiver of higher performance may be found in Viterbi, Andrew, "Principles of Spread Spectrum Communications", Addison-Wesley Publishing Company 1995, disclosing a multiple dual series search acquisition scheme. Such a multiple dual series search acquisition scheme comprises both a correlator for correlating an identification signal received from the base station and an additional hypothesis testing.

[0003] A known receiver architecture for CDMA mobile systems is the rake receiver. See Price, R. et al., "A Communication Technique for Multipath Channels," Proceedings of the IRE, 1958, vol. 46, pp. 555-570. A rake receiver consists of a bank of correlation-type receivers or correlators. Each correlator of the bank of correlators is used to detect a separate multi-path component.

[0004] A further acquisition scheme is disclosed in Gweon-Do Jo, Sook-Heyn Chang, Hye-Yeon Kweon, and Sun-Young Kim, Performance Evaluation of Pilot Channel Acquisition System in CDMA Forward Link, IEEE 48th Vehicular Technology Conference, 1998, Vol. 2, pp. 1244-1248, however it turned out that this acquisition scheme fails if multi-path components of a signal are present.

[0005] It is an object of the present invention to improve a receiver, in particular a CDMA receiver, for a, in particular mobile, communication device.

[0006] The object is achieved by the receiver arrangement according to claim 1 or a communication device according to claim 10. Such a receiver arrangement or mobile communication device comprises

- a signal generator for generating at least m locally generated signals, which are time delayed by a delay time from each other,
- a correlator for obtaining m correlated signals by correlating a received identification signal with the m locally generated signals, and
- a ranking arrangement for identifying j correlated

signals of highest power out of the m correlated signals.

[0007] The object of the present invention is further achieved by a method for operating a receiver arrangement by receiving an identification signal and obtaining m correlated signals by correlating the identification signal with m locally generated signals, which are time delayed from each other, and identifying j correlated signals of highest power out of the m correlated signals.

[0008] The object of the present invention is further achieved by a method for operating a receiver arrangement, by

- receiving an information signal and an identification signal,
- obtaining m correlated signals by correlating the identification signal with m locally generated signals, which are time delayed from each other,
- identifying j correlated signals of highest power out of the m locally generated signals,
- selecting n correlated signals out of the j correlated signals, wherein n is less than or equal j,
- obtaining n or less delayed information signals by delaying the information signal by time delays which correspond to the n selected correlated signals, and
- adding the n or less delayed information signals or adding the n or less delayed information signals and the information signal.

[0009] In a preferred embodiment of the invention the receiver arrangement is a Code Division Multiple Access, CDMA, receiver, in particular a rake receiver.

[0010] In a further preferred embodiment of the invention the delay time is less than 20 μ s.

[0011] In a further preferred embodiment of the invention m is less than 100, in particular about 80.

[0012] In a further preferred embodiment of the invention j is greater than 5 and less than m/2, in particular less than 30.

[0013] In a further preferred embodiment of the invention j is less than 20.

[0014] In a further preferred embodiment of the invention the receiver arrangement comprises an evaluation arrangement for selecting n correlated signals out of the j correlated signals of highest power, wherein n is less than or equal j.

[0015] In a further preferred embodiment of the invention the receiver arrangement, which is capable of receiving an information signal, comprises a delay arrangement for obtaining n or less delayed information signals by delaying the information signal by delay times which correspond to the n selected correlated signals.

[0016] In a further preferred embodiment of the invention the receiver arrangement comprises a summation arrangement for adding the n or less delayed information signals or adding the n or less delayed information signals and the information signal.

[0017] The communication device is preferably a mobile communication device, in particular a mobile phone or mobile computer. However the communication device may also be part of a wireless building communications system.

[0018] Further advantages of the present invention will become apparent from the claims and the description below, based on the drawings, in which:

- FIG. 1 shows a mobile communication device.
- FIG. 2 shows a receiver arrangement.
- FIG. 3 discloses the multi-path identification arrangement.
- FIG. 4 shows a correlator.
- FIG. 5 discloses the ranking arrangement.
- FIG. 6 shows an embodiment of a ranking filter in terms of a flow chart.
- FIG. 7 shows a part of the flow chart of FIG. 6, and
- FIG. 8 shows a descrambling arrangement

[0019] FIG. 1 shows a mobile communication device 1. The mobile communication device 1 is in the present embodiment a mobile phone for a European Telecommunications Standard Institute system or Universal Mobile Telecommunications system, an Association of radio Industries and Businesses Wideband Code Division Multiple Access communications system, and/or a Wideband Code Division Multiple Access system being defined by 3rd Generation Partnership Project communications system.

[0020] The mobile communication device 1 may be a multi-mode mobile station, capable of operating, for example in a Global System for Mobile Telecommunications (GSM) system as well as a UMTS system.

[0021] The mobile communication device 1 comprises the receiver arrangement 2 and processing means 3. The receiver arrangement 2 receives signals from a base station (not shown). The processing means 3, among many other tasks, processes signals received from the receiver arrangement 2. The mobile communication device 1 may further comprise additional circuitry, filter means, processing means, storage means, man machine interfaces and so on which are denoted by reference number 4.

[0022] FIG. 2 shows the receiver arrangement 2 in more detail. The receiver arrangement 2 comprises a multi-path identification arrangement 10 which determines time delays τ_1, \dots, τ_n based upon an identification signal S_{ID} received from the base station. Due to reflections and different travels of the signal sent by the base station the identification signal S_{ID} comprises time delayed versions of the signal originally sent from the base station.

[0023] The receiver arrangement 2 further comprises a descrambling arrangement descrambling an information signal S_{info} originating from the base station based upon the time delays τ_1, \dots, τ_n provided by the multi-path identification arrangement. The output of the de-

scrambling arrangement 11 is a signal S_{de} which is further processed by the processor means 3. The information signal S_{info} carries user information such as speech, email or internet information.

5 [0024] FIG. 3 discloses the multi-path identification arrangement 10 in more detail. The multi-path identification arrangement comprises a signal generator 22 for generating locally generated signals S_{L1}, \dots, S_{Lm} having essentially the same information content as the identification signal S_{ID} of the base station. The locally generated signals S_{L1}, \dots, S_{Lm} are timed delayed from each other by a delay between 100ns and 300ns. In the current embodiment the delay is 130ns. m is preferably less than 100. Preferably it is about 80. In the current embodiment m is 77. The largest absolute delay time of a locally generated signal S_{L1}, \dots, S_{Lm} is preferably between 10 μ s and 20 μ s.

[0025] The multi-path identification arrangement further comprises a correlator 20 for correlating the identification signal S_{ID} with the locally generated signals S_{L1}, \dots, S_{Lm} . The correlation can be carried out serial or in parallel or in a combination of both methods. All three possibilities are within the scopes of the claims. If the correlation is carried out in parallel correlator 20 comprises m subcorrelators 201, 202 and 203 as indicated in FIG. 4. The outputs of the correlator 20 are correlated signals S_{C1}, \dots, S_{Cm} . They are inputs to a first filter 21 removing noise from the signals. The output signals of the filter are denoted with S_{CF1}, \dots, S_{CFm} . These signals are fed into a ranking arrangement 23 which is shown in more detail in FIG. 5. The ranking arrangement 23 identifies the j signals S_{R1}, \dots, S_{Rj} of highest power out of the m correlated signals S_{CF1}, \dots, S_{CFm} . The signals of highest power S_{R1}, \dots, S_{Rj} are outputs of the ranking arrangement 23 and inputs to a second filter 24. The second filter 24 is preferably a more complex filter than the first filter 21. The output signals S_{RF1}, \dots, S_{RFj} of the second filter 24 are fed into an evaluation arrangement 25. The evaluation arrangement 25 determines the delay times τ_1, \dots, τ_n . This is most preferably done via a hypothesis testing algorithm which tests the hypothesis that a delay time τ_i matches a delay time of a signal component in the identification signal S_{ID} . The hypothesis test is preferably a likelihood ratio test which is for example disclosed in K. Sam Shanmugan and A.M. Breipohl "Random signals, the detection estimation and data analysis" John Wiley and Sons, 1988.

[0026] The evaluation arrangement 25 also generates control parameters $c_{\tau_1}, \dots, c_{\tau_n}$ for controlling the signal generator 22.

[0027] FIG. 5 discloses the ranking arrangement 23 in more detail. The ranking arrangement 23 comprises a power detector 26 detecting the power P_1, \dots, P_m of the signals S_{CF1}, \dots, S_{CFm} . The values for P_1, \dots, P_m as well as the signals S_{CF1}, \dots, S_{CFm} are fed into a ranking filter 27. The ranking filter 27 determines j signals S_{R1}, \dots, S_{Rj} of highest power out of the signals S_{CF1}, \dots, S_{CFm} .

[0028] A preferred embodiment of the ranking filter 27 is shown in FIG. 6 in terms of a flow chart. After the start the 30 a step 31 is carried out reading the values of P_1, \dots, P_m and the signals S_{CF1}, \dots, S_{CFm} . Step 31 is followed by a step 32, assigning

$P(1), \dots, P(m) = P_1, \dots, P_m$

and

$S(1), \dots, S(m) = S_{CF1}, \dots, S_{CFm}$

i.e., a variable $P(1)$ is assigned to have a value P_1 , a variable $P(2)$ is assigned to have a value P_2 , etc. and a signal $S(1)$ to be S_{CF1} , a signal $S(2)$ to be S_{CF2} , etc.

[0029] Step 32 is followed by a step 33 defining variables L and R as

$$L = \text{INT} (m/2) + 1$$

and

$$R=m$$

where INT is a function rounding down to the closest integer.

[0030] Step 33 is followed by a decision block 34 checking whether L is greater than 1. If this condition is fulfilled decision block 34 is followed by a step 35 decreasing L by 1, i.e.:

$$L = L - 1$$

[0031] Step 35 is followed a step 36 assigning the following:

$$PO = P(L)$$

$$SO = S(L)$$

[0032] Step 36 is followed by step 37 with

$$I=L$$

$$J=L+L$$

[0033] If L is not greater than 1 decision block 34 is followed by a step 38 assigning:

$$PO = P(R)$$

$$SO = S(R)$$

$$P(R) = P(1)$$

$$S(R) = S(1)$$

[0034] Step 38 is followed by decision block 39 checking whether R is equal to 1. If this condition is not fulfilled decision block 39 is followed by a step 37.

[0035] Step 37 is followed by decision block 43 checking whether J is greater than R . If this decision is not fulfilled decision block 43 is followed by decision block 34. If however this decision is fulfilled, decision block 43 is followed by a step 44. Step 44 is shown in more detail in FIG. 7. Step 44 is followed by decision block 43.

[0036] If R equals 1 decision block 39 is followed by a step 40 assigning:

$$P(1) = PO$$

$$S(1) = SO$$

[0037] Step 40 followed by a step 41 assigning

$$S_{R1}, \dots, S_{Rj} = S(1), \dots, S(j)$$

and outputting S_{R1}, \dots, S_{Rj} .

[0038] After 41 is carried out the program is terminated as indicated with reference number 42.

[0039] FIG. 7 shows step 44 in more detail. Decision block 43 is followed by a decision block checking whether

$$P(J) > P(J+1)$$

If

$$P(J) > P(J+1)$$

decision block 50 is followed by a step 51 incrementing J :

$$J = J + 1$$

[0040] Step 51 is followed by a decision block 52.

[0041] If, however, the condition

$$P(J) > P(J+1)$$

is not met, decision block 50 is followed by decision block 52 checking whether

$$PO > P(J)$$

[0042] If this condition is met, decision block 52 is followed by a step 54 with

$$P(I) = P(J)$$

[0043] Step 54 is followed by a step 55 with:

$$I = J$$

and

$$J = J+J$$

[0044] Step 55 is followed by decision block 43.

[0045] If the condition

$$PO > P(J)$$

is not met, decision block 52 is followed by a step 53 with:

$$J = R+1$$

[0046] Step 53 is followed by a decision block 43.

[0047] FIG. 8 shows the descrambling arrangement 11 in more detail. The descrambling arrangement 8 comprises a delay arrangement 50 delaying the information signal S_{info} by the delay times τ_1, \dots, τ_n to obtain delayed information signals $S_{info1}, \dots, S_{infon}$ of the information signal S_{info} respectively. The delayed information signals $S_{info1}, \dots, S_{infon}$ are added by a summation arrangement 51. The output of the summation point 31 is signal S_{de} which is the sum of $S_{info1}, \dots, S_{infon}$.

[0048] In all the embodiments of the present invention described herein, as well as other embodiments of the present invention, the method or communication device may be used in an European Telecommunications Standard Institute (ETSI) or Universal Mobile Telecommunications System (UMTS), an Association of Radio Industries and Businesses (ARIB) Wideband Code Division Multiple Access (WCDMA) system, or a Wideband Code Division Multiple Access (WCDMA) system being defined by 3rd Generation Partnership Project (3GPP) system.

[0049] Various embodiments within the scope of the present invention are possible. For example, the present invention may be applied to various frequency bands. Additionally, the present invention may be applied for monitoring in other types of mobile communication systems than those described herein.

Claims

1. Receiver arrangement (2), in particular for a mobile communication device (1), comprising a signal generator (22) for generating at least m locally generated signals (S_{L1}, \dots, S_{Lm}), which are time delayed by a delay time from each other, and a correlator for obtaining m correlated signals (S_{C1}, \dots, S_{Cm}) by correlating a received identification signal with the m locally generated signals (S_{L1}, \dots, S_{Lm}).
characterized in that,
the receiver arrangement (2) comprises a ranking arrangement (23) for identifying j correlated signals (S_{R1}, \dots, S_{Rj}) of highest power out of the m correlated signals (S_{C1}, \dots, S_{Cm}).
2. Receiver arrangement (2) according to claim 1,
characterized in that,
the receiver arrangement (2) is a Code Division Multiple Access, CDMA, receiver, in particular a rake receiver.
3. Receiver arrangement (2) according to claim 1 or 2,
characterized in that,
the delay time is less than $20\mu s$.
4. Receiver arrangement (2) according to claim 1, 2, or 3,
characterized in that,
 m is less than 100, in particular about 80.
5. Receiver arrangement (2) according to claim 1, 2, 3, or 4,
characterized in that,
 j is greater than 5 and less than $m/2$, in particular less than 30.
6. Receiver arrangement (2) according to claim 1, 2, 3, 4, or 5,
characterized in that,
 j is less than 20.
7. Receiver arrangement (2) according to one of the foregoing claims,
characterized in that,
the receiver arrangement (2) comprises an evaluation arrangement (25) for selecting n correlated signals of the j correlated signals (S_{R1}, \dots, S_{Rj}) of highest power, wherein n is less than or equal j .
8. Receiver arrangement (2) according to claim 7, wherein the receiver arrangement (2) is capable of receiving an information signal,
characterized in that,
the receiver arrangement (2) comprises a delay arrangement for obtaining n or less delayed information signals by delaying the information signal by delay times which correspond to the n selected cor-

related signals.

9. Receiver arrangement (2) according to claim 8,
characterized in that,
the receiver arrangement (2) comprises a summation arrangement for adding the n or less delayed information signals or adding the n or less delayed information signals and the information signal. 5
10. Communication device, in particular comprising a receiver arrangement (2) according to one of the foregoing claims, having a signal generator (22) for generating at least m locally generated signals (S_{L1}, \dots, S_{Lm}), which are time delayed by a delay time from each other, and a correlator for obtaining m correlated signals (S_{C1}, \dots, S_{Cm}) by correlating a received identification signal with the m locally generated signals (S_{L1}, \dots, S_{Lm}),
characterized in that,
the receiver comprises a ranking arrangement (23) for identifying j correlated signals (S_{R1}, \dots, S_{Rj}) of highest power out of the m correlated signals (S_{C1}, \dots, S_{Cm}). 10 15 20 25
11. Communication device according to claim 10,
characterized in that,
the communication device is a mobile communication device (1). 30
12. Communication device according to claim 11,
characterized in that,
the communication device is a mobile phone or mobile computer. 35
13. Method for operating a receiver arrangement (2), in particular for operating a receiver arrangement (2) according to one of the claims 1 through 9, by receiving an identification signal and obtaining m correlated signals (S_{C1}, \dots, S_{Cm}) by correlating the identification signal with m locally generated signals (S_{L1}, \dots, S_{Lm}), which are time delayed from each other,
characterized in that,
j correlated signals (S_{R1}, \dots, S_{Rj}) of highest power out of the m correlated signals (S_{C1}, \dots, S_{Cm}) are identified. 40 45
14. Method for operating a receiver arrangement (2), in particular for operating a receiver arrangement (2) according to one of the claims 1 through 9, by
 - receiving an information signal and an identification signal, 50 55
 - obtaining m correlated signals (S_{C1}, \dots, S_{Cm}) by correlating the identification signal with m locally generated signals (S_{L1}, \dots, S_{Lm}), which

are time delayed from each other,

- identifying j correlated signals (S_{R1}, \dots, S_{Rj}) of highest power out of the m locally generated signals (S_{L1}, \dots, S_{Lm}).
- selecting n correlated signals out of the j correlated signals, wherein n is less than or equal j.
- obtaining n or less delayed information signals by delaying the information signal by time delays which correspond to the n selected correlated signals, and
- adding the n or less delayed information signals or adding the n or less delayed information signals and the information signal.

Fig. 1

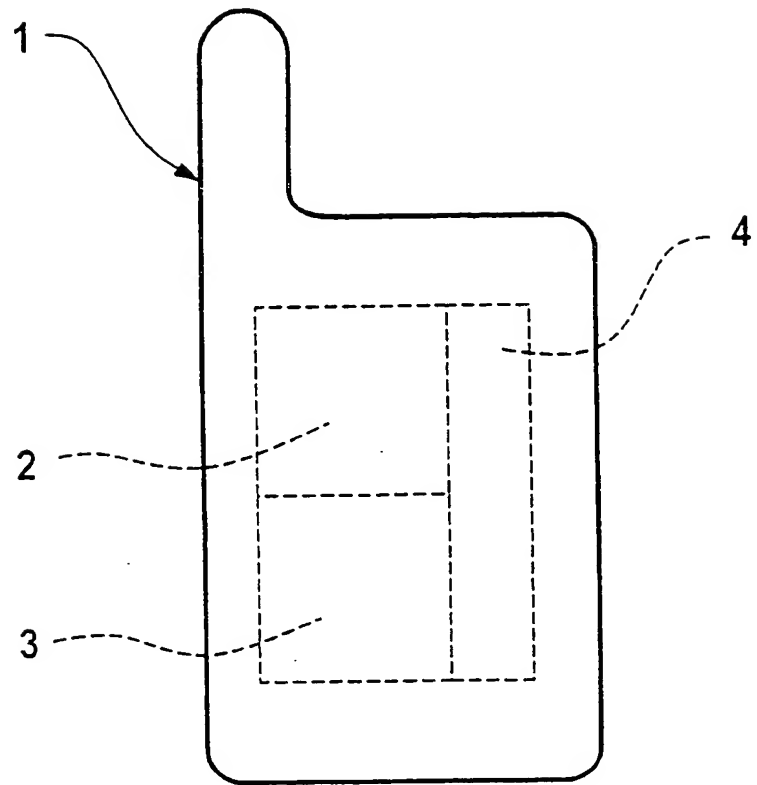


Fig. 2

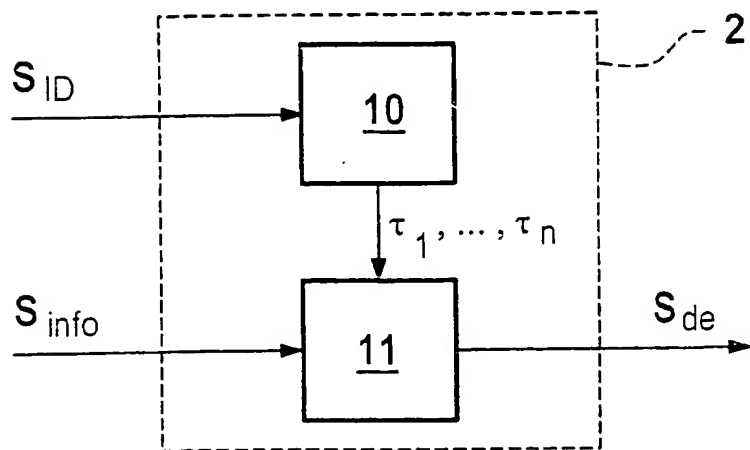


Fig. 3

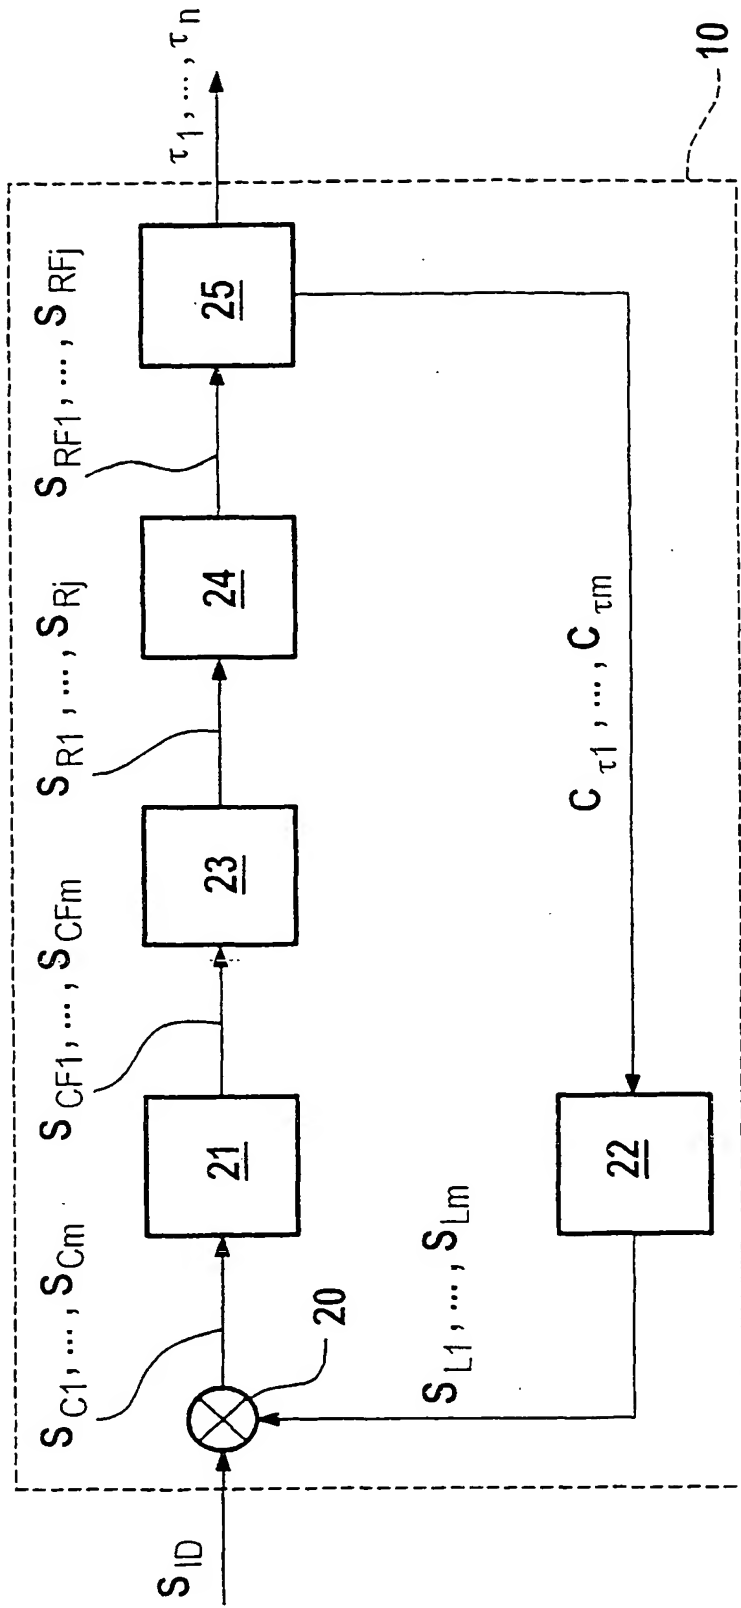


Fig. 4

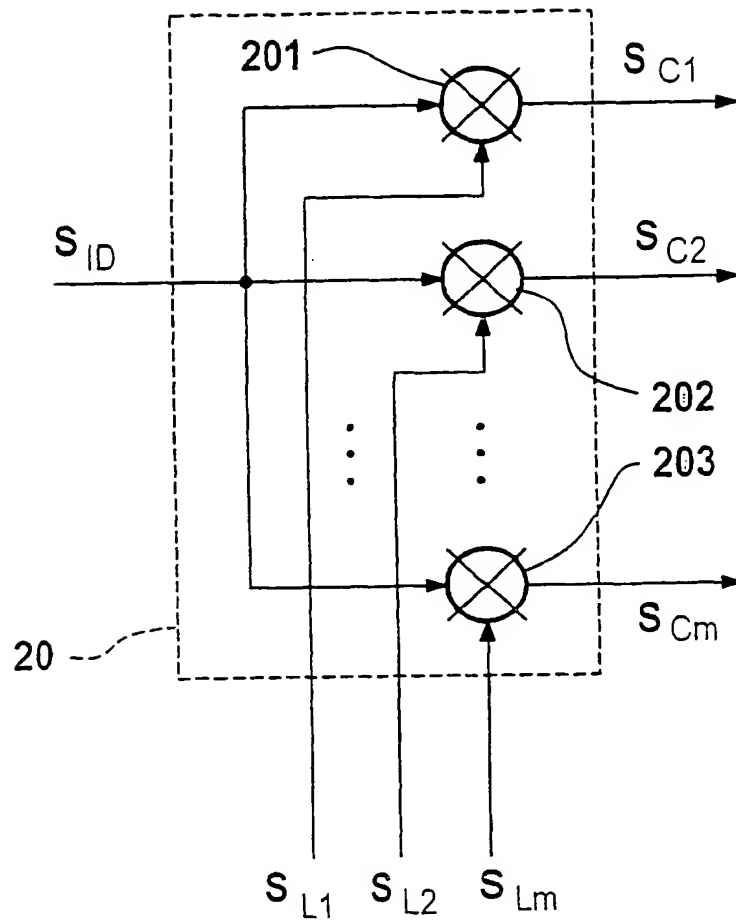
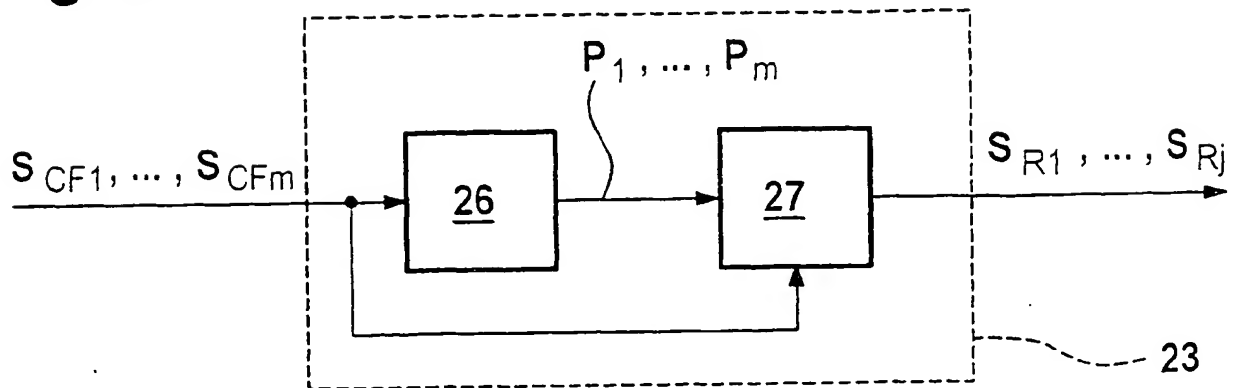


Fig. 5



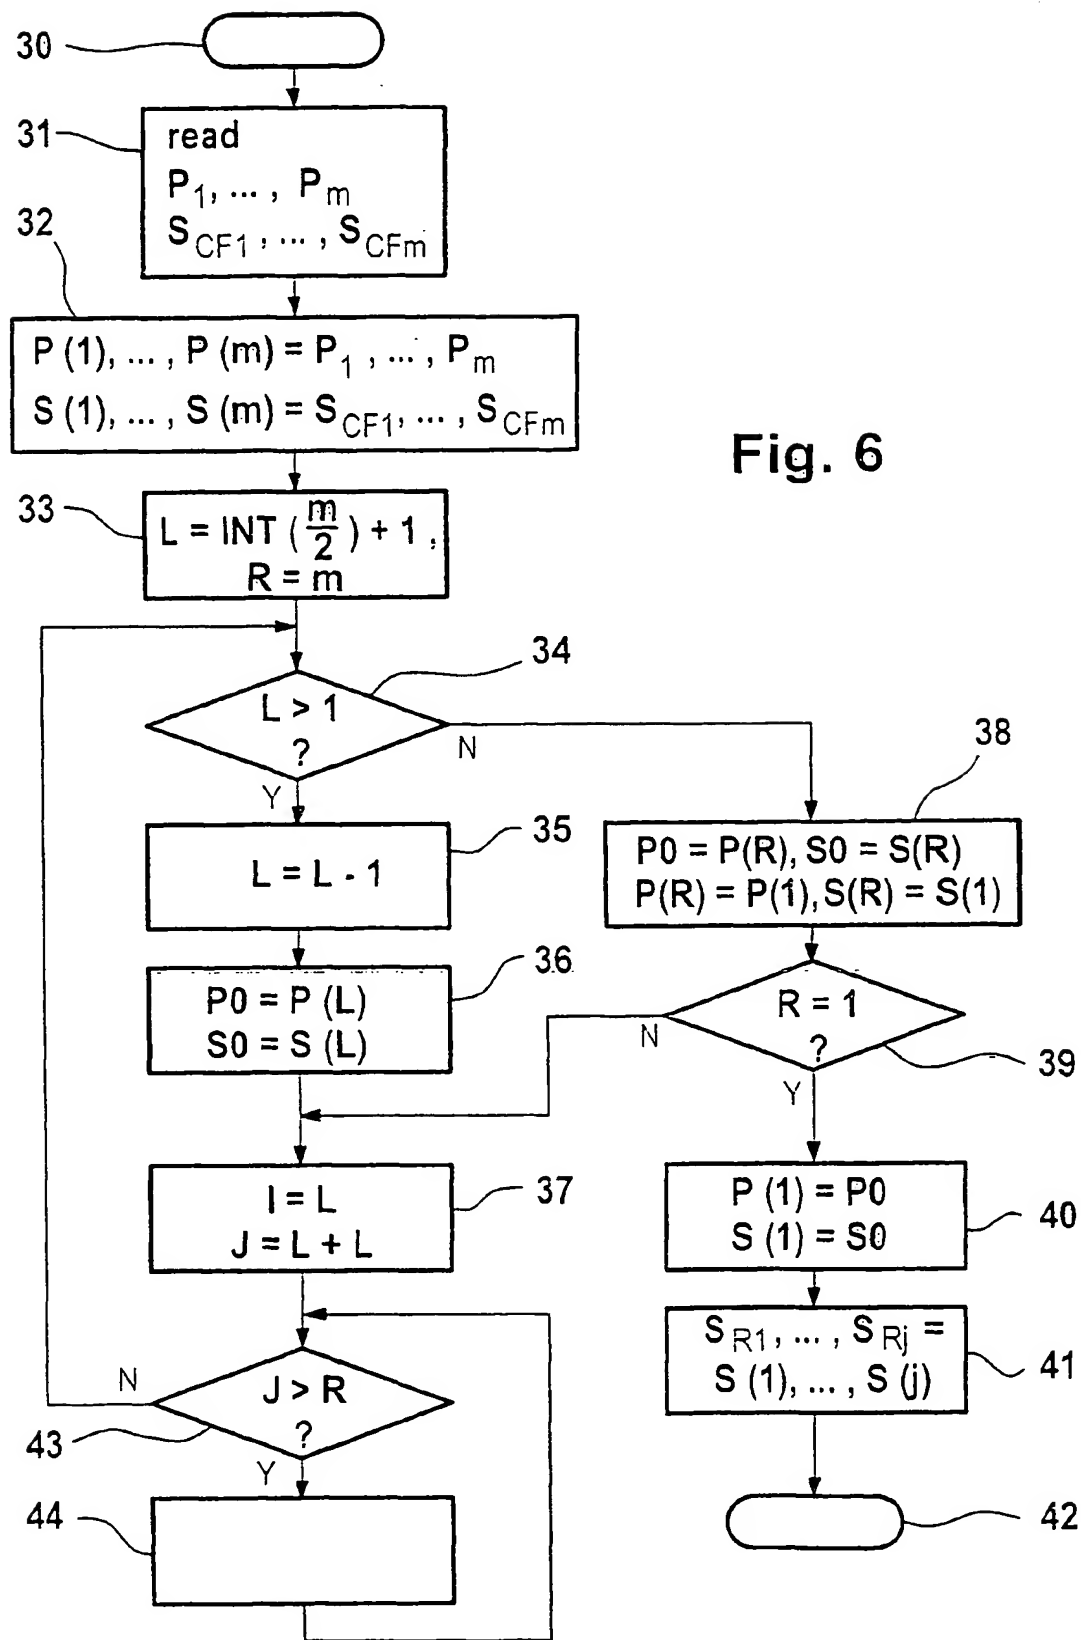


Fig. 7


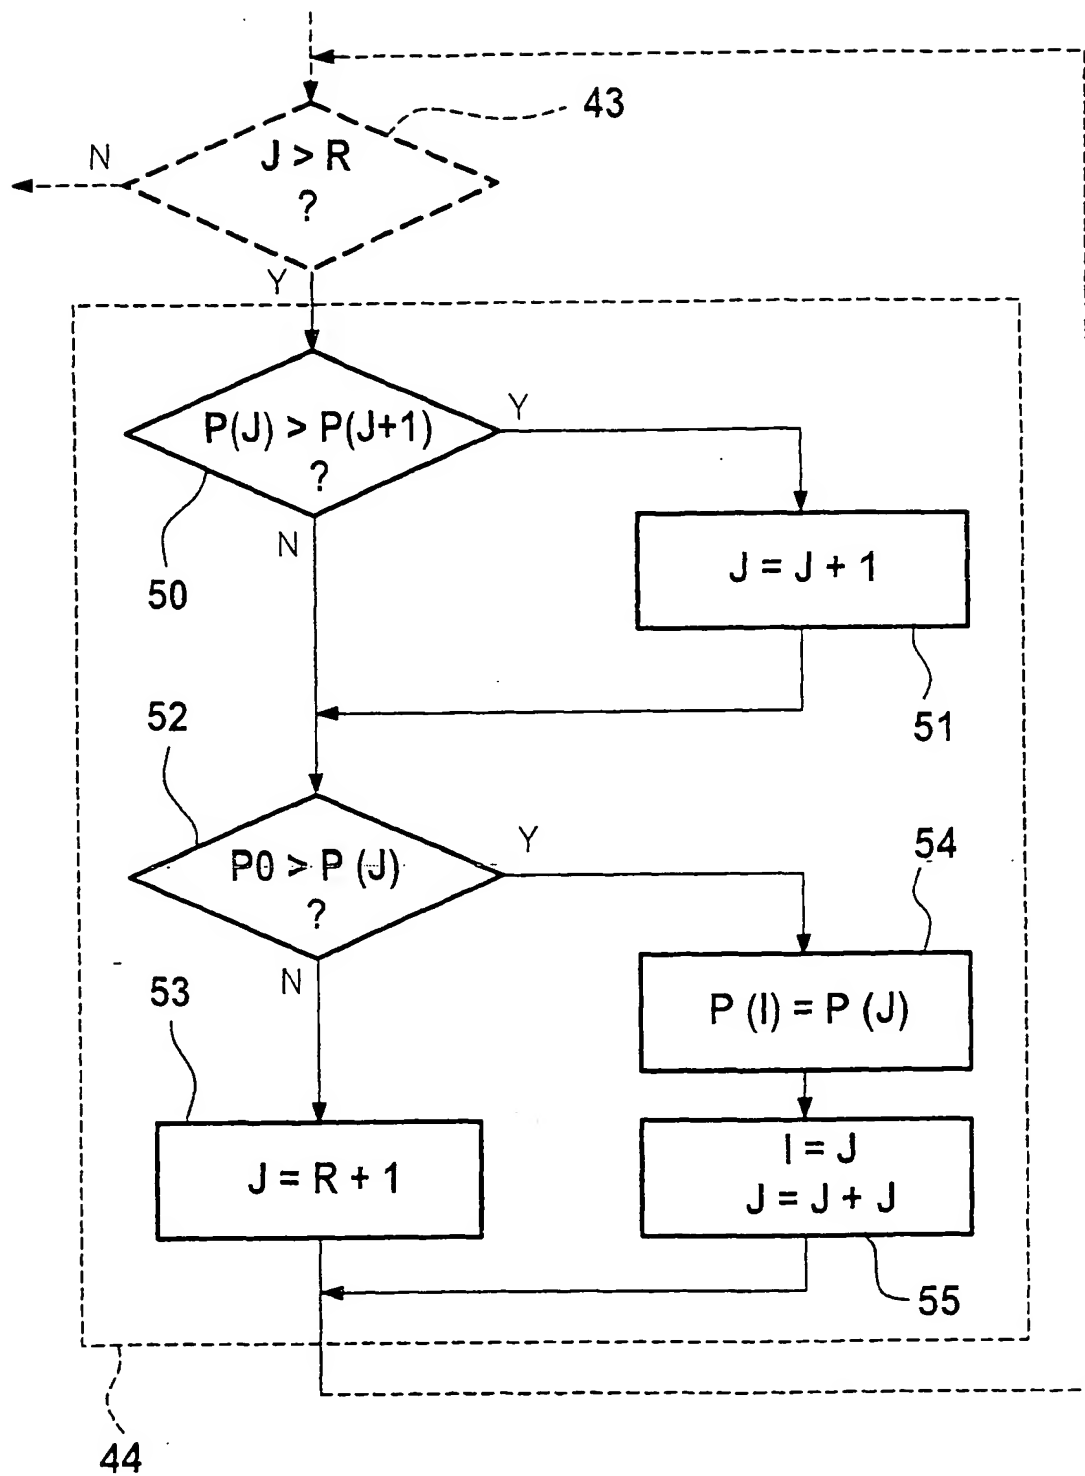


Fig. 8

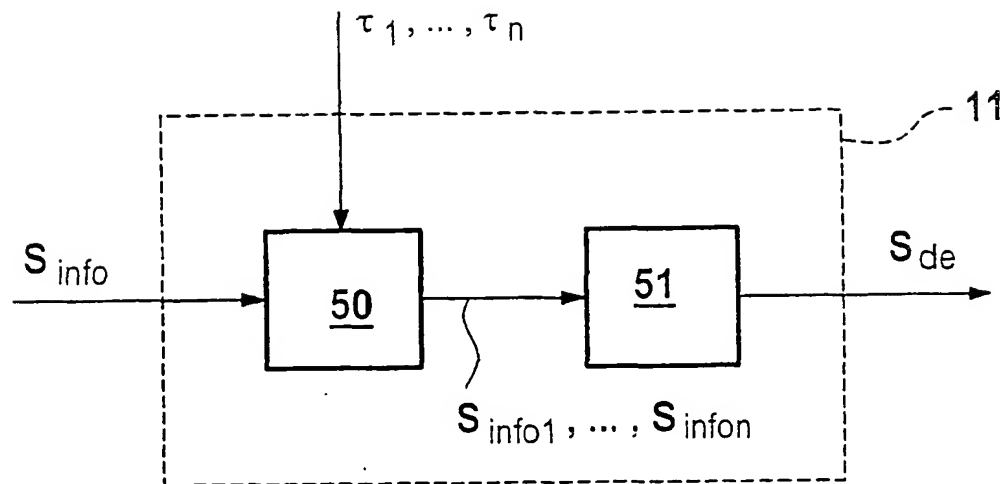

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 11 0027

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 96 10873 A (QUALCOMM INC) 11 April 1996 (1996-04-11) * abstract * * page 2, line 19 - line 34 * * page 10, line 20 - line 31; figures 2,3 * * page 28, line 26 - page 29, line 31; figures 5,12 * * page 32, line 19 - line 35 *	1-14	H04B1/707
A	US 5 280 472 A (GILHOUSEN KLEIN S ET AL) 18 January 1994 (1994-01-18) * column 2, line 21 - line 40 *	3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 October 2000	Examiner Ó Donnabháin, E
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 11 0027

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9610873 A	11-04-1996	AU 688625 B	12-03-1998
		AU 3945195 A	26-04-1996
		AU 707834 B	22-07-1999
		AU 6997798 A	30-07-1998
		BR 9506390 A	16-09-1997
		CA 2174243 A	11-04-1996
		CN 1135815 A	13-11-1996
		EP 0732013 A	18-09-1996
		FI 962258 A	22-07-1996
		JP 9506234 T	17-06-1997
		US 5710768 A	20-01-1998
		US 5867527 A	02-02-1999
		ZA 9507858 A	22-04-1996
US 5280472 A	18-01-1994	US 5513176 A	30-04-1996
		US 5533011 A	02-07-1996
		US 5602834 A	11-02-1997
		AU 652602 B	01-09-1994
		AU 9138691 A	08-07-1992
		BG 61052 B	30-09-1996
		BG 97842 A	25-04-1994
		BR 9107213 A	03-11-1993
		CA 2097066 A	08-06-1992
		CZ 9301097 A	13-04-1994
		FI 932523 A	02-08-1993
		HU 216923 B	28-10-1999
		HU 64655 A	28-01-1994
		IL 100213 A	30-03-1995
		JP 6504660 T	26-05-1994
		KR 9700790 B	20-01-1997
		MX 9102432 A, B	01-06-1992
		NO 932041 A	04-06-1993
		RU 2111619 C	20-05-1998
		SK 57193 A	06-10-1993
		WO 9210890 A	25-06-1992

EPO FORM P445B

For more details about this annex see Official Journal of the European Patent Office, No. 12/82